




TELEPHONE: 302.455.8656
 EMAIL: SALES@ZOTEXALLC.COM
 200 CONTINENTAL DR., STE. 401
 NEWARK, DE 19713

GROOVED COUPLER

Key Features

- ▶ RIGID COUPLING DESIGN INTENDED USE: AGRICULTURE, AND LANDSCAPE IRRIGATION INDUSTRY
- ▶ AVAILABLE WITH GALVANIZED OR EPOXY COATED BODY
- ▶ MAX WORKING PRESSURE: 300 PSI
- ▶ ALL ZOTEXA PRODUCTS BACKED BY INDUSTRY LEADING WARRANTY

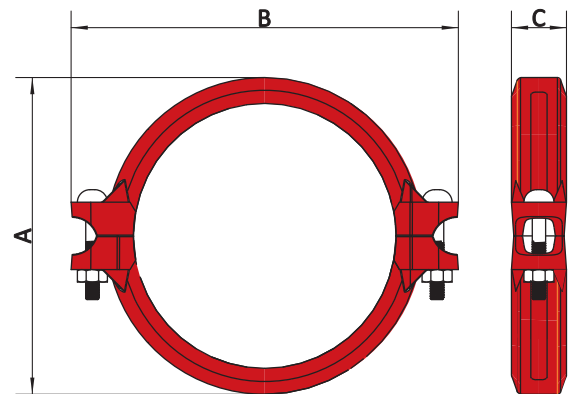

Dimensions

Size (in)	Pipe OD (in)	Max Pressure (PSI)	Dimensions (in)			Bolt Size (in)
			A	B	C	
1"	1.33	300	2.17	3.82	1.77	3/8 x 1-1/2"
1-1/4"	1.67	300	2.50	4.23	1.77	3/8 x 1-3/4"
1-1/2"	1.90	300	2.72	4.49	1.77	3/8 x 1-3/4"
2"	2.38	300	3.29	4.88	1.81	3/8 x 2-1/8"
2-1/2"	2.88	300	3.86	5.39	1.81	3/8 x 2-1/8"
2-1/2"	3.00	300	3.86	5.47	1.81	3/8 x 2-1/8"
3"	3.50	300	4.49	6.14	1.81	3/8 x 2-1/8"
4"	4.25	300	5.43	7.32	1.97	1/2 x 2-5/8"
4"	4.50	300	5.59	7.44	1.97	1/2 x 2-5/8"
5"	5.25	300	6.46	8.39	1.97	1/2 x 2-5/8"
5"	5.50	300	6.69	8.74	1.97	1/2 x 2-5/8"
5"	5.56	300	6.69	8.58	1.97	1/2 x 2-5/8"
6"	6.25	300	7.56	9.61	1.97	1/2 x 2-5/8"
6"	6.50	300	7.72	9.61	1.97	1/2 x 2-5/8"
6"	6.63	300	7.80	9.88	1.97	1/2 x 2-5/8"
8"	8.52	300	10.00	13.39	2.44	3/4 x 3-1/2"
8"	8.63	300	10.08	12.44	2.36	5/8 x 3-1/8"
10"	10.53	300	12.32	15.75	2.52	3/4 x 3-1/2"
10"	10.75	300	12.56	15.47	2.52	3/4 x 3-1/2"
12"	12.54	300	14.49	18.27	2.52	7/8 x 4-1/3"
12"	12.75	300	14.72	17.83	2.56	3/4 x 4-1/3"